




# DOZER BLADE

## MOTOR GRADER MOUNTED

36" overall height.  
Available in 8 ft. and 9 ft. models.

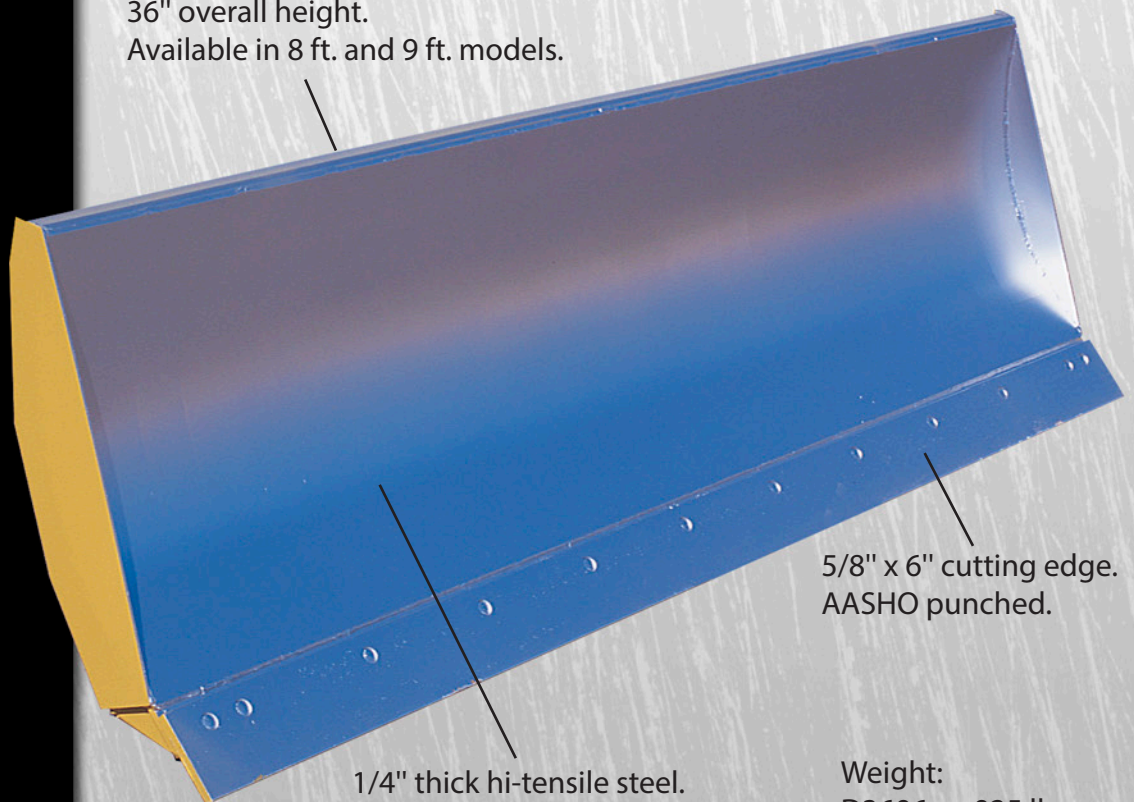

5/8" x 6" cutting edge.  
AASHO punched.

1/4" thick hi-tensile steel.

Weight:  
D3696 — 925 lbs.  
D36108 — 1025 lbs.

A rugged, fixed-angle utility blade for all seasons and jobs: winter ice and snow control, backfilling, leveling windrows, light digging, etc. The Dozer Blade will interchange with Falls Snow Plows. Unit may be adapted to other hitches and couplers.



# Falls® SPECIFICATIONS

The following specifications are designed to assist you in acquiring a  
**Falls® Fixed Angle Dozer Blade**  
or its equal. Differences in manufacturing designs are acknowledged. The dimensions within the specifications are intended to indicate the size, type and quality of unit desired.

1. Snowplow shall be latest design and model. Materials used shall be top-grade to insure quality.
2. Overall length shall not be less than \_\_\_\_\_.
3. Cutting edge shall be 5/8" (16mm) x 6" (152.4mm) x \_\_\_\_\_ ft. AASHO punched.
4. Overall height shall not be less than 36" (.9m) with cutting edge.
5. Moldboard shall be constructed of not less than 1/4" (6mm) high tensile steel rolled to a precise curvature of 27" (.7m) radius to produce an efficient dispersal of material. Bottom moldboard support shall be minimum 4" (102mm) x 4" (102mm) x 3/4" (19mm) MOD-36 angle iron with reinforcement gussets between the bolt holes. The moldboard reinforcement shall consist of four (4) rolled channel iron, 4" (120mm) x 7.25 lb. Each end of the moldboard shall be reinforced with 1/4" (6mm) A-36 steel plate. Top moldboard support shall consist of 2" (51mm) x 3/16" (5mm) wall square tubing. Moldboard shall be provided with lift ring.
6. Unit shall be equipped push arms/link attachment to fit Falls \_\_\_\_\_ Hitch System.
7. Approximate weight of plow shall be \_\_\_\_\_ lbs.
8. Plow shall be Falls Model D\_\_\_\_\_ or equal. Other prior to the bid opening date to allow time for approval.

YOUR DEALER IS:

*Specifications are subject to change without notice.*

The policy and promise of Little Falls Machine, Inc. is continuing product improvement. Design change and structural alterations may occur without prior notice. Such changes will not sacrifice quality or product integrity.

*Falls® is a registered trademark of Little Falls Machine, Inc.  
Little Falls Machine, Inc. is an equal opportunity employer.*



**LITTLE FALLS MACHINE, INC.**

300 Lindbergh Drive South  
Little Falls, MN 56345  
Phone 800-772-PLOW  
(320) 632-9266  
Fax (320) 632-3484  
[www.fallsplovs.com](http://www.fallsplovs.com)